

ELECTRIC PALLET TRUCK



AC POWERED ELECTRIC WALKIE
3,000LB

AC

FEATURES

Capacity

- 3,000lbs

Weight

- 451.9 lbs

Travel Speed

- 2.7 mph loaded
- 3.0 mph no load

Standard Equipment

- Maintenance free battery – 24V/65Ah
- On-board charger – 110V plug-in

Tire/Wheels

- Polyurethane drive wheel
- Spring loaded balance wheels provide stability and consistent traction on uneven floors and minimizes product damage caused by tipping
- Nylon entry rollers for ease of skid entry

AC Drive Motor

- Low noise and vibration
- 3 phase AC technology provides efficiency and steady acceleration while contributing to smooth operation overall
- Brushless motor minimizes maintenance

Controls

- 10-70 degree tiller operation
- German designed ergonomic tiller offers left and right hand operation
- Thumb operated speed control, forward, reverse, lift, lower and horn
- Simple and precise positioning
- Brake controlled by directional switch
- Tight turning radius

Options

- Fork lengths and widths
- Dual load wheels

PT30-MINI

Light Duty Applications



Application:

Ideal solution for lift gate, local delivery and lower volume applications

Starke's PT30-MINI is a light weight and compact electric pallet jack that delivers an ideal balance of power and maneuverability in tight working environments. Being more compact than a regular powered pallet truck, the PT30-MINI is easier to maneuver in confined spaces such as loaded trailers or small storerooms. Its smaller size also improve its efficiency as a high output AC motor and maintenance-free batteries provide steady power throughout the day.



ELECTRIC PALLET TRUCK

STARKE
LIFTMAXX



AC POWERED ELECTRIC WALKIE
3,000LB

AC

		Light Duty PT30-MINI
Load capacity	LBS	3000
Load centre distance	IN	24
Wheel number, front/rear (x = drive wheel)	#	1X - 2/4
Wheels	TYPE	polyurethane
Wheel dimensions, front	IN	7.7
Wheel dimensions, rear	IN	2.9
Wheel base	IN	51
Max. lift height	IN	7.5
Fork height, lowered	IN	2.9
Ground clearance	IN	0.9
Overall length	IN	65.1 or 67.9
Overall width	IN	27
Length to face of forks	IN	19.8
Fork dimensions (h/w/l) - 45"	IN	2.1/6.3/45
Fork dimensions (h/w/l) - 48"	IN	2.1/6.3/48
Aisle width for pallets 39"x47" crossways	IN	72.9 or 75.7
Aisle width for pallets 32"x47" lengthways	IN	74.9 or 75.7
Turning radius	IN	56.1 or 57.2
Travel speed, laden/unladen	MPH	2.7/3
Battery type	TYPE	2 x 12v
Battery voltage, nominal capacity K20	V/Ah	24/65
Charger, 110v plug-in	TYPE	on board
Driving motor power	HP	1.2 (AC)
Lifting motor power	HP	1.1 (DC)
Battery weight	LBS	79.4
Service weight (with battery)	LBS	451.9

Starke Continuous Stability System

Starke Continuous Stability reduces incidence of tipping while turning corners, or travelling on uneven surfaces. A fixed drive wheel supported by two spring loaded castors are in constant contact with the ground, supporting the stability of the lift truck. The Starke Continuous Stability feature offers better control over competitor fixed stop supports, which sit off the ground and wear quickly over time.

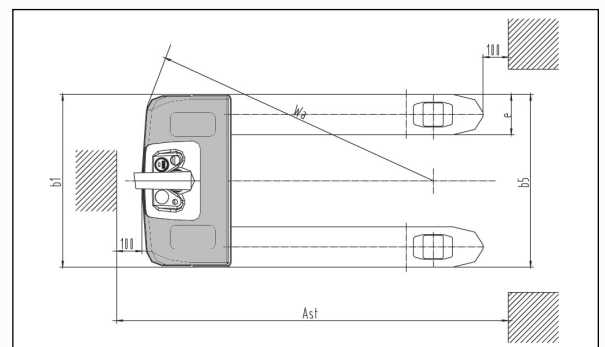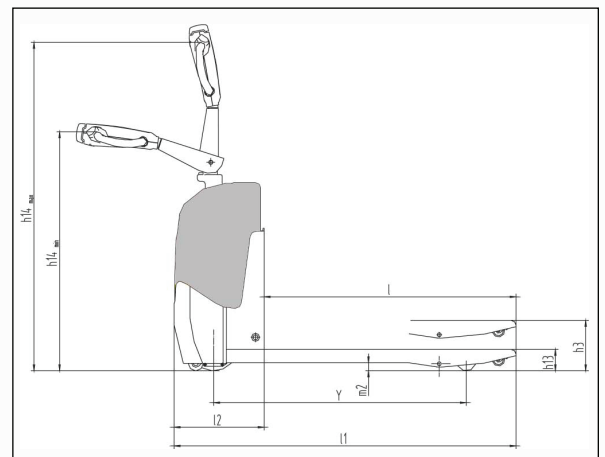

Meets or exceeds ANSI B56.1 Standards. Specifications, features, and images are provided for reference only and may be subject to change without prior notice.

Rev 02/2018

www.starkeforklift.com • 1-877-435-4352 • info@starkeforklift.com

STARKE