

COUNTERBALANCED STACKER

AC POWERED ELECTRIC WALKIE



3000 LB | 1.5 TON

STARKE
LIFTMAXX

AC

FEATURES

- Long ergonomically designed handle enables ease of steering.
- Side mounted lift cylinders offer the operator a clear view through the mast and improves stability.
- Quality German steel mast.
- Adopts a vertical driving wheel for effortless maneuverability, low noise, and ease of maintenance.
- Compact design and low center gravity offer good steering and stability.

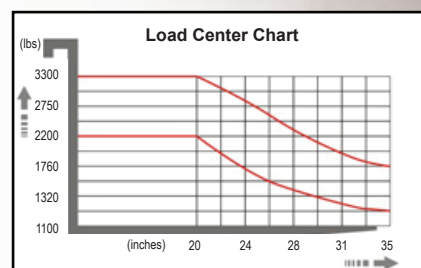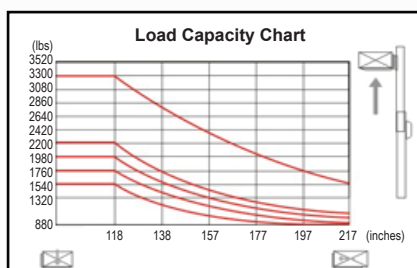

ES30CAX-177

Capacity	Q (lb)	3000
Load Center	C (in)	24
Wheelbase	y (in)	54.3
Tire Size	Front	in
	Rear	in
Tread	Front	b10 (in)
	Rear	b11 (in)
Mast Height - Lowered	h1 (in)	99.0/79.1/85.7
Free Lift	h2 (in)	option
Maximum Lift Height	h3 (in)	197
Mast Height - Extended	h4 (in)	236
Overall Length	l1 (in)	104.3
Length To Face Of Forks	l2 (in)	66.9
Overall Width	b1(in)	39.0
Fork Dimensions	s/e/l (in)	1.8 x 3.9 x 37.4 (42.1)
Reach Distance	l4 (in)	-
Ground Clearance	Center of Wheelbase	m2 (in)
Aisle Width	1000x1200 Pallet/Crossways	Ast (in)
Aisle Width	800x1200 Pallet/Lengthways	Ast (in)
Turning Radius	Wa (in)	61.8
Travel Speed	Laden/Unladen	mph
Lift Speed	Laden/Unladen	in/s
Lowering Speed	Laden/Unladen	in/s
Maximum Gradeability	Laden/Unladen	%
Service Brake		Electromagnetic
Battery - Industrial	v/Ah	24/400
Charger	Plug-in, Off Board	v
Battery Weight	lb	880
Battery Dimension	l/w/h	in
Service Weight with Battery	lb	4444

Meets or exceeds ANSI B56.1 Standards. Specifications, features, and images are provided for reference only and may be subject to change without prior notice.

Rev 05/2017

STARKE